


MXRC2

Update from MXRC1

Modification

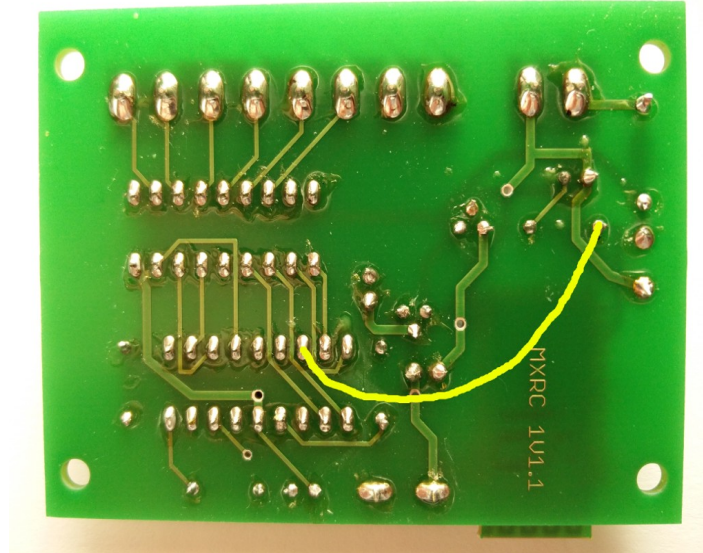

NOTES

- Replace the PIC chip (new PIC16F1827)
- make pc board modification as above
(connect pin 16 of the PIC chip to pin 24 of the HC-06 where the resistor for the red LED is connected)
- press the button and switch the power on for factory settings